


Tilslut kamera til ny Router

Hvis du får ny router, har dit kamera ikke længere kontakt med det trådløse netværk.

Du skal gøre følgende:

1. Kameraet skal kobles til din nye router med det kabel, som medfulgte, da kameraet blev leveret.
2. Kameraet skal tilsluttes strøm.
3. Gå på din PC og åben HomeMonitor hjemmesiden (<http://monitor.y-cam.com>)
4. Log dig på kameraet, som du plejer




Log in to your HomeMonitor™ account

 Keep me logged in


[I forgot my login details](#)

Create a HomeMonitor account




[Learn more](#) about HomeMonitor


5. Klik på setting

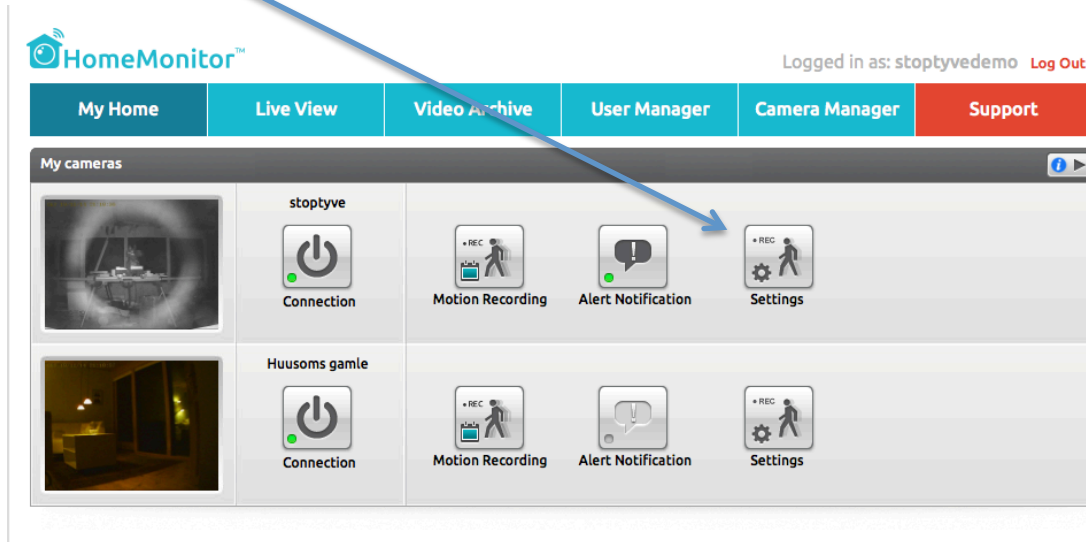

6. Klik på Camera Manager

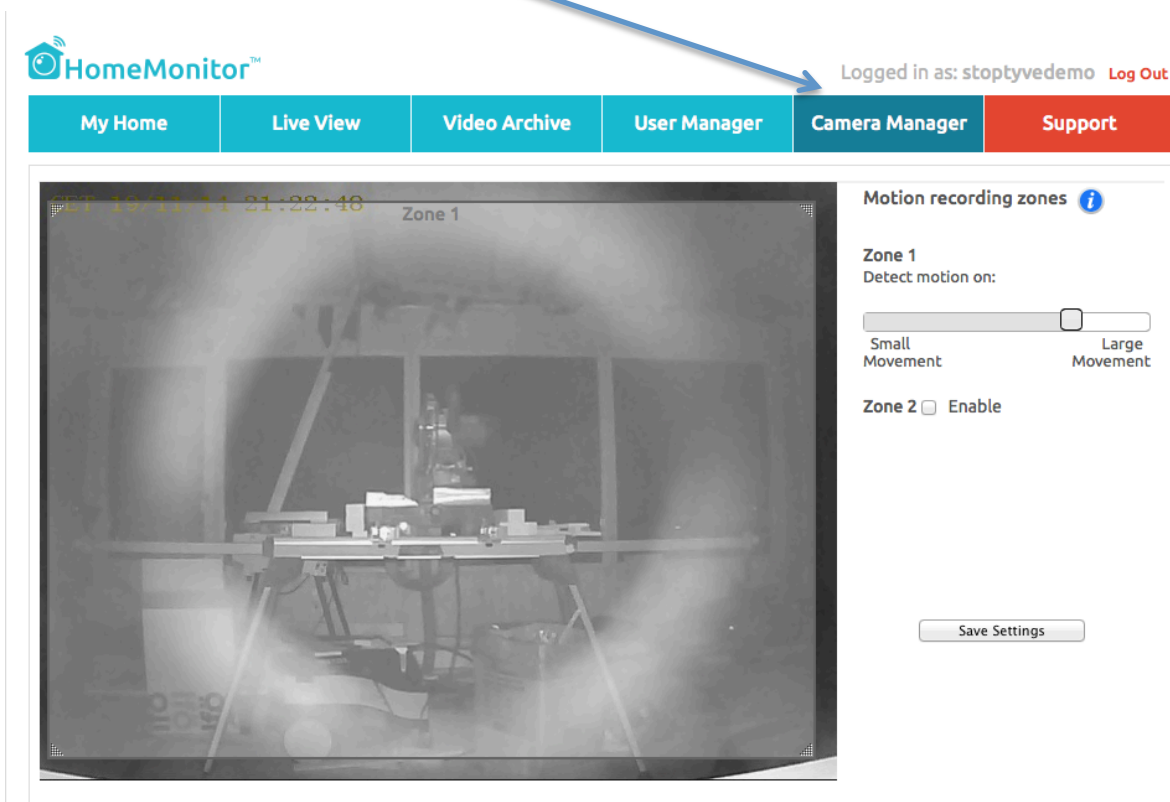

7. Klik på Wifi settings

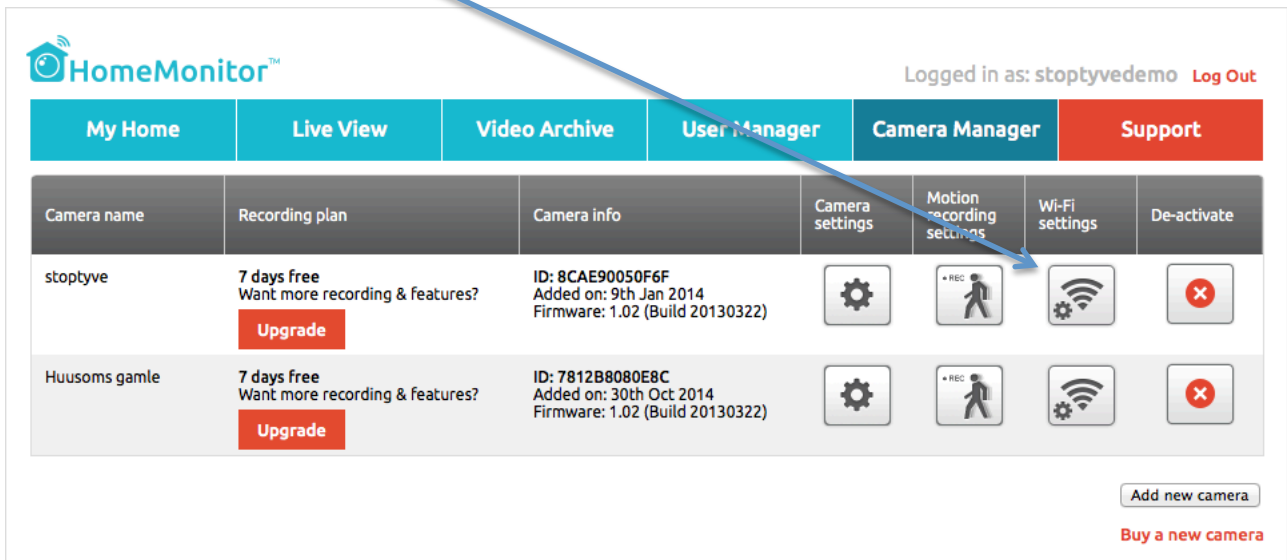


HomeMonitor™ Logged in as: stoptyvedemo Log Out

My Home Live View Video Archive User Manager Camera Manager Support

Camera name	Recording plan	Camera info	Camera settings	Motion recording settings	Wi-Fi settings	De-activate
stoptyve	7 days free Want more recording & features? Upgrade	ID: 8CAE90050F6F Added on: 9th Jan 2014 Firmware: 1.02 (Build 20130322)				
Huusoms gamle	7 days free Want more recording & features? Upgrade	ID: 7812B8080E8C Added on: 30th Oct 2014 Firmware: 1.02 (Build 20130322)				

[Add new camera](#)
[Buy a new camera](#)

8. Vælg dit netværk og angiv password til netværket.

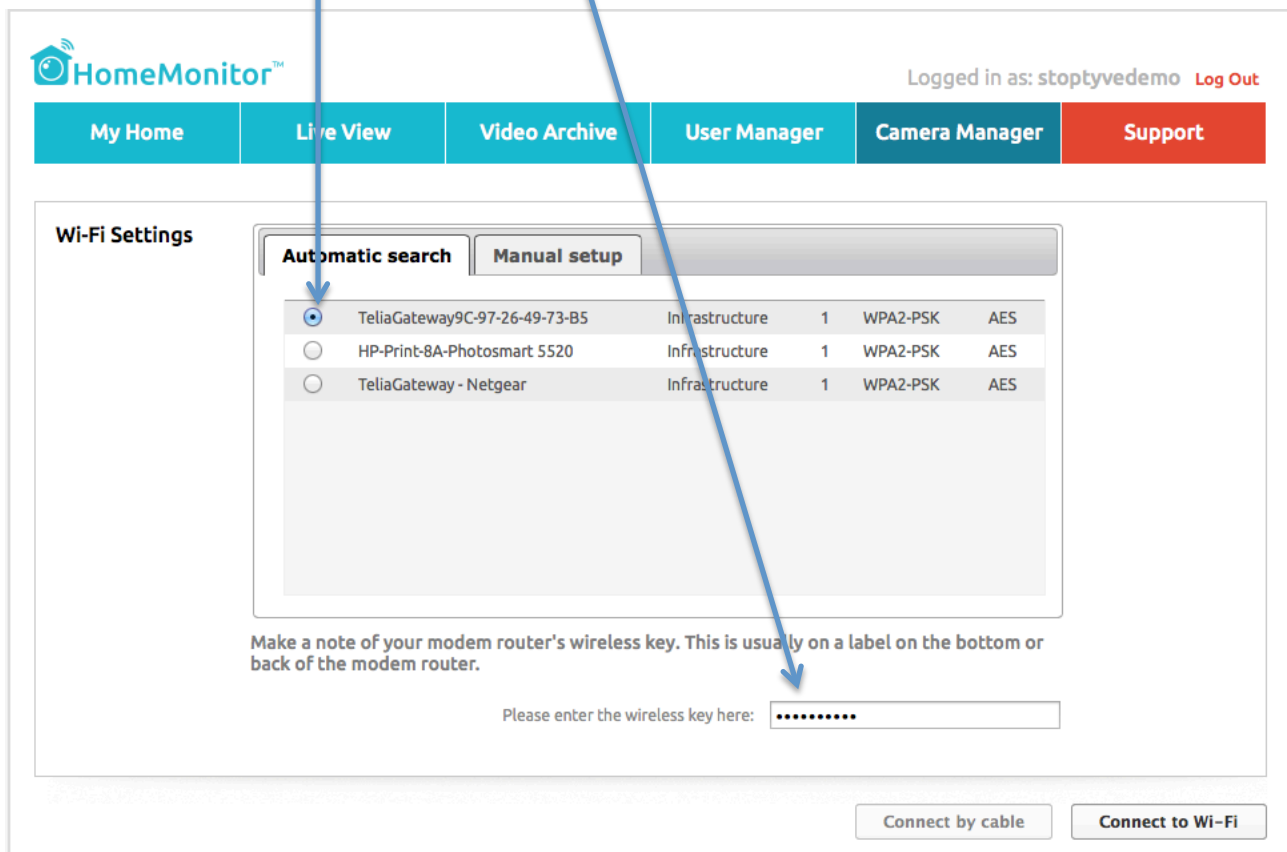

HomeMonitor™ Logged in as: stoptyvedemo Log Out

My Home Live View Video Archive User Manager Camera Manager Support

Wi-Fi Settings

Automatic search Manual setup


<input checked="" type="radio"/>	TeliaGateway9C-97-26-49-73-B5	Infrastructure	1	WPA2-PSK	AES
<input type="radio"/>	HP-Print-8A-Photosmart 5520	Infrastructure	1	WPA2-PSK	AES
<input type="radio"/>	TeliaGateway - Netgear	Infrastructure	1	WPA2-PSK	AES

Make a note of your modem router's wireless key. This is usually on a label on the bottom or back of the modem router.

Please enter the wireless key here:


[Connect by cable](#) [Connect to Wi-Fi](#)

9. Nu forsøger kameraet at koble sig op på det valgte wifi,

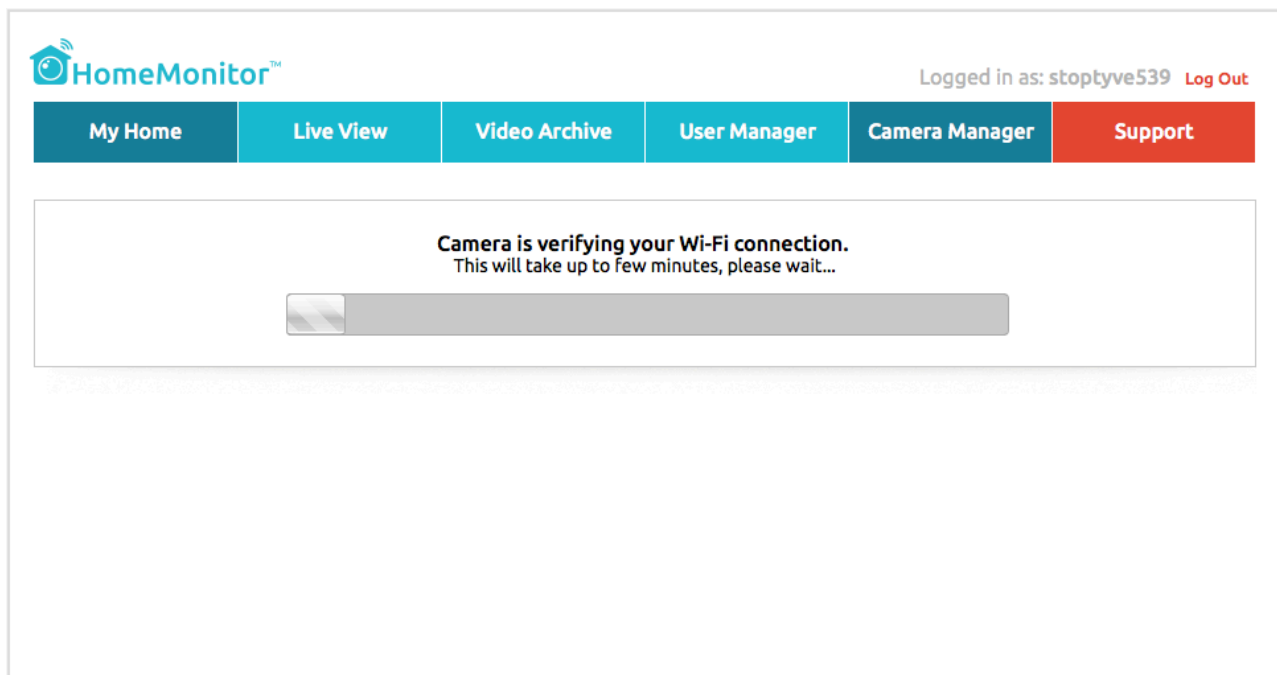

The screenshot shows the HomeMonitor web interface. At the top left is the HomeMonitor logo. At the top right, it says "Logged in as: stoptyve539" with a "Log Out" link. Below the logo is a navigation bar with six buttons: "My Home", "Live View", "Video Archive", "User Manager", "Camera Manager", and "Support". The main content area contains a message: "Camera is verifying your Wi-Fi connection. This will take up to few minutes, please wait...". Below the message is a progress bar that is approximately 10% full.

10. og når det lykkes, skriver den Done. Herefter klikker du på Next, og så er kameraet klar på det nye wifi.

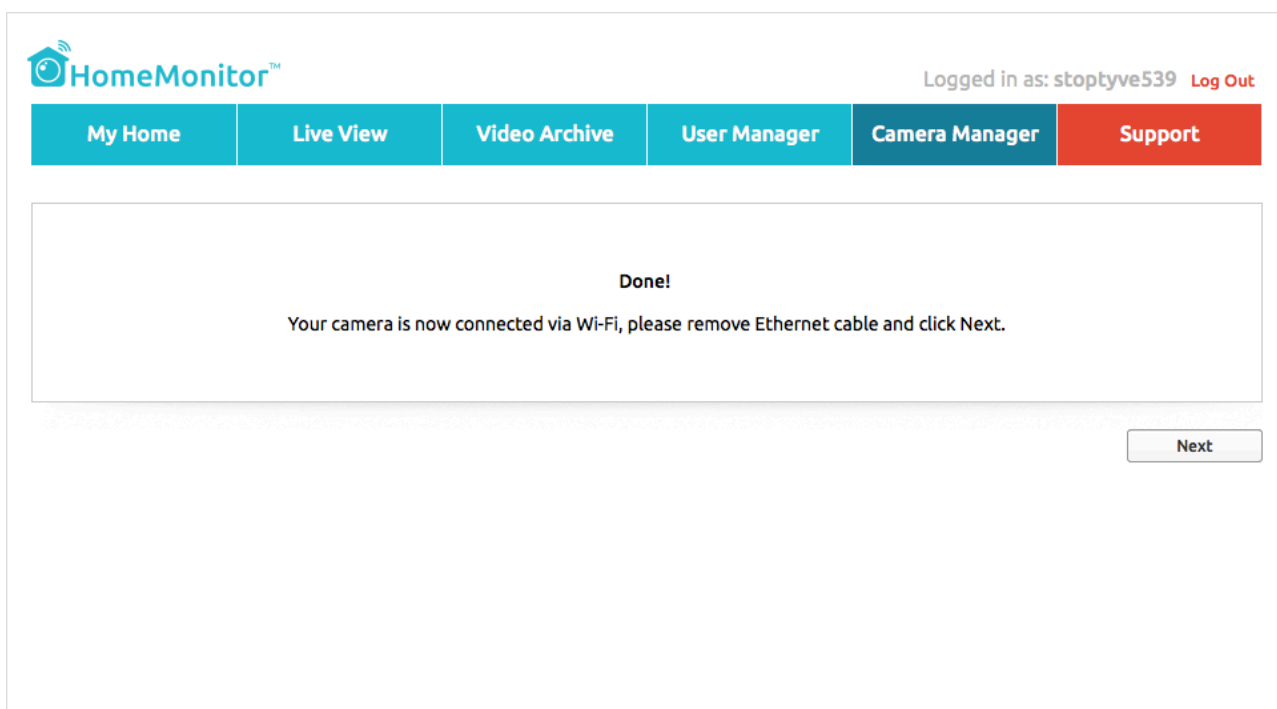

The screenshot shows the HomeMonitor web interface after successful Wi-Fi connection. The navigation bar and login information are the same as in the previous screenshot. The main content area now displays "Done!" followed by the instruction: "Your camera is now connected via Wi-Fi, please remove Ethernet cable and click Next." At the bottom right of the main content area, there is a "Next" button.